

Abrasive Belt Machines

**Flexiband**

## Flexiband

Hydrafeed offer a range of Abrasive Belt Machines to suit most deburring, finishing or metal removal applications in a modern machine shop environment.

All Abrasive Belt Machines are supplied as a standalone item or with peripheral equipment such as a dust extractor, contact wheel, or pedestal.

### Models Available:

#### Flexiband No 1

Flexiband No 1 is an introductory model, ideal for deburring or polishing smaller components.

#### Flexiband No 2B

With a wider belt capacity, the Flexiband 2B is a more robust machine, ideal for light metal removal as well as deburring operations.

#### Flexiband No 24HD

Flexiband No 24HD is a heavy duty model and is supplied with a 50mm wide abrasive belt and a 3 phase, 2 hp motor. Ideal for metal removal and more substantial deburring applications.

#### Flexiband No 44HD

Fitted with a 100mm wide abrasive belt for larger components, Flexiband No 44HD has the same features as a No 24HD.




*Model shown is the Flexiband No 1*



### A Flexiband to suit your needs

From polishing, light or heavy deburring to metal removal, Hydrafeed have a Flexiband to suit your needs

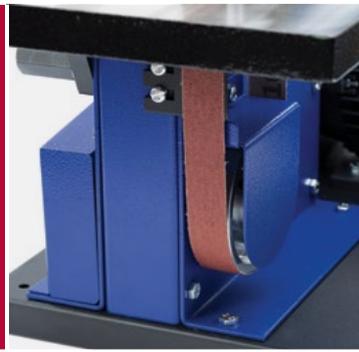


### Save time

Using a Hydrafeed Flexiband reduces deburring to a fraction of the time taken using conventional methods



### Flexibility

The angle of the Flexiband table can be adjusted to suit your application

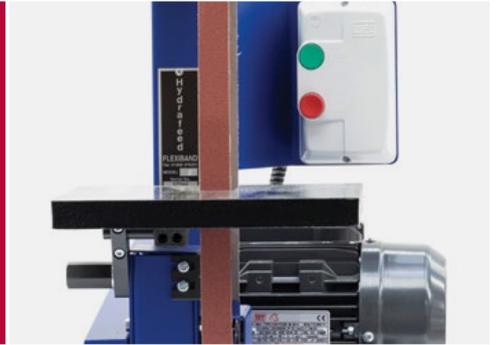

### Quality product

With a robust build, the Flexiband range has provided years of service in UK machine shops



### Optional extras

Include Pedestal, Dust Extraction Unit and Contact Wheel

## Options

### Pedestal mounted

All models of the Flexiband can be supplied mounted to a pedestal, useful if you have limited bench space. The pedestal can be fixed to the floor and presents the Flexiband at a safe working height.

### Dust extractor

All models of the Flexiband can be mounted to a dust extraction unit. Ideal when working in a Clean Environment.

### Contact wheel

The Flexiband table is easily removed and a contact wheel fitted; giving you increased flexibility to allow deburring of internal diameters and machined components.

### Full abrasive belt guard

Offered as an option on the No 1 and 2B, a full abrasive belt guard comes as standard on the 24HD and 44HD.

### Alternative belt widths

A standard width abrasive belt is supplied with every machine; alternative width belts are available to purchase.

### Belt platen

Different width belt platens are available for alternative width belts.

### Pack of 10 assorted grit belts

Abrasive belts are available to purchase in packs of 10. Grits to suit customer requirements.

### Manufactured by Hydrafeed in the UK

- All spares and consumables can be purchased through Hydrafeed
- Product support is available
- Guaranteed for 1 year
- UKCA Certified

## Abrasive Belt Machines

# Flexiband


Technical Specifications	No 1
Operating voltage*	230 V; 3.9 amp; Single Phase; ¾ hp
Standard belt size	25mm wide
Weight (approximate)	28kg

Technical Specifications	No 2B
Operating voltage*	230 V; 3.9 amp; Single Phase; ¾ hp
Standard belt size	50mm wide
Weight (approximate)	30kg

Technical Specifications	No 24HD
Operating voltage	440 V; 3.2 amp; Three Phase; 2hp
Standard belt size	50mm wide
Weight (approximate)	52kg

Technical Specifications	No 44HD
Operating voltage	415 V; 3.2 amp; Three Phase; 2hp
Standard belt size	100mm wide
Weight (approximate)	56kg

\*Three phase option available

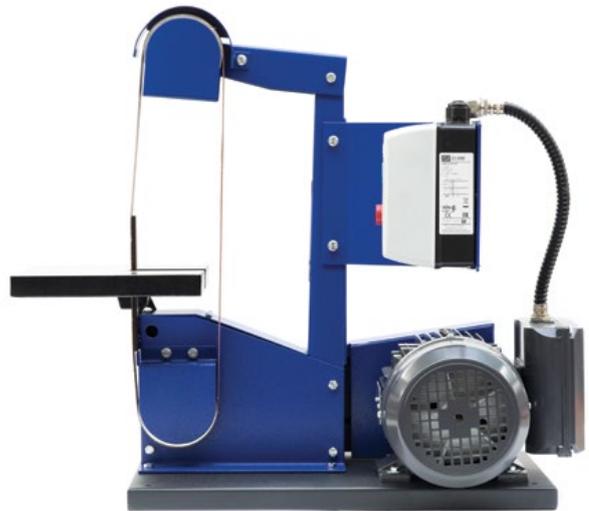

### Hydrafeed Ltd

Talgarth House  
Bond Avenue  
Mount Farm Industrial Estate  
Milton Keynes  
MK1 1JD

**Tel:** +44 (0)1908 376331

**E-mail:** [info@hydrafeed.co.uk](mailto:info@hydrafeed.co.uk)

**Web:** [www.hydrafeed.co.uk](http://www.hydrafeed.co.uk)

