




SURFCOM TOUCH Series

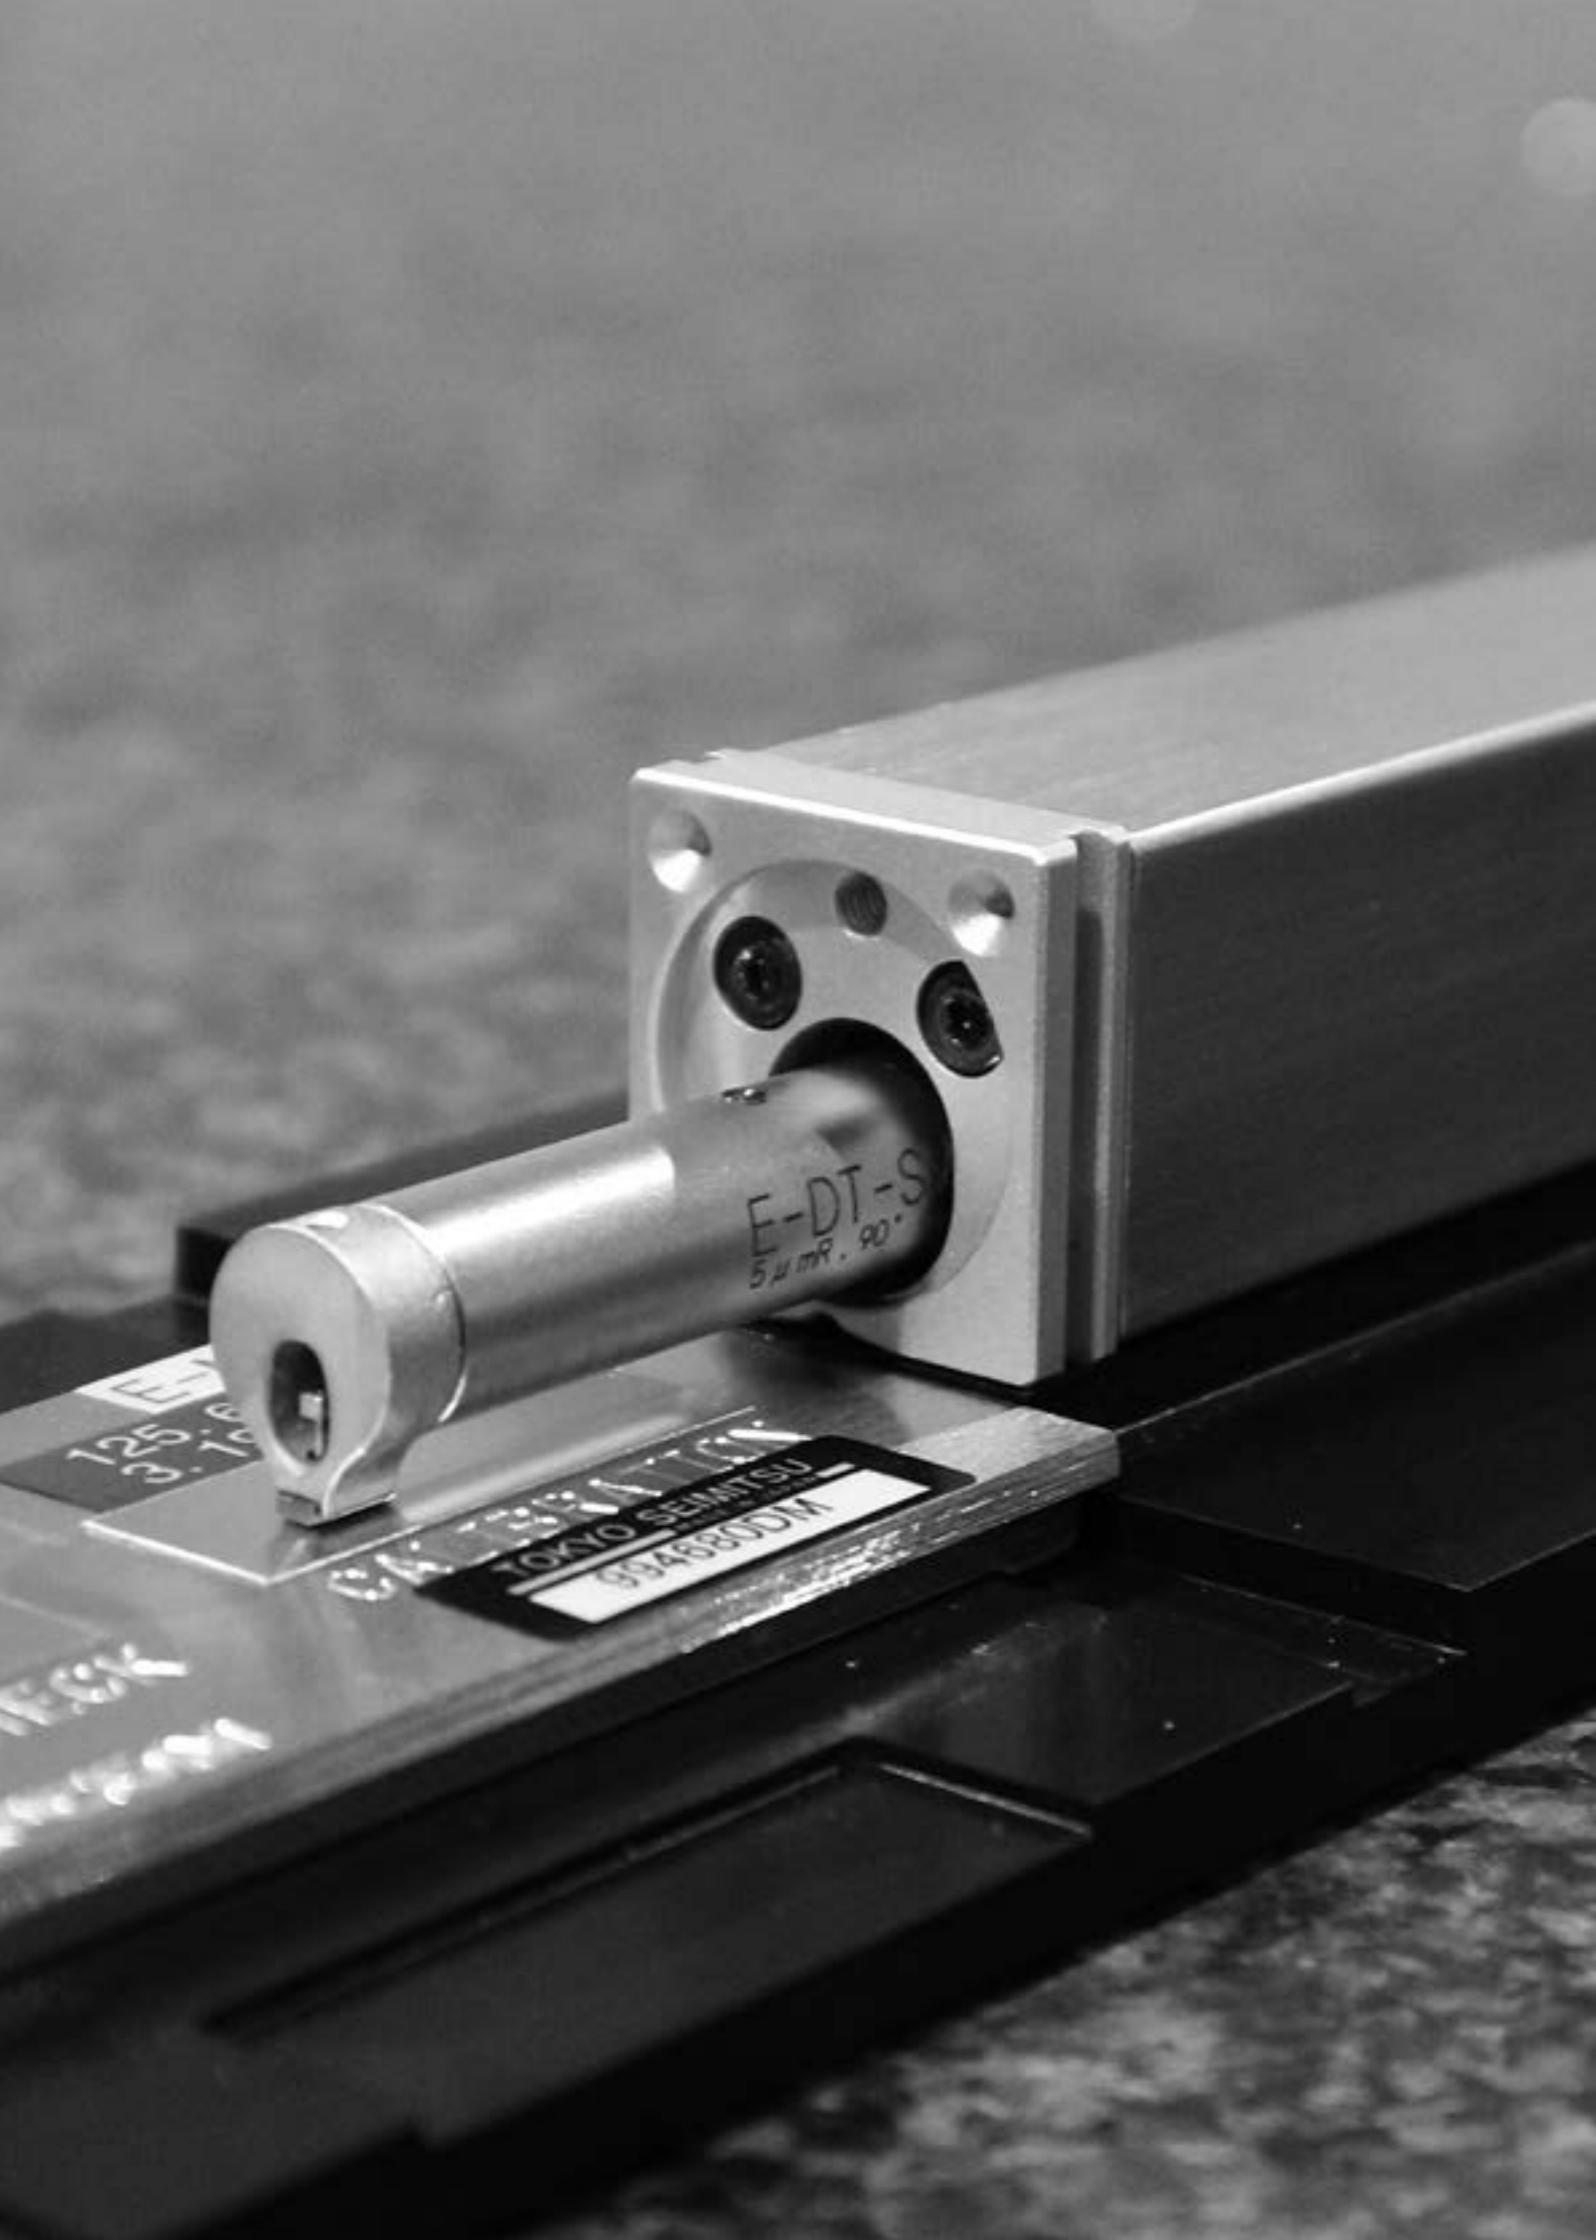

E-DT-S
5 μm IR, 90°

TOKYO SEIMITSU
9948800UM

125.6
13.10

SURFCOM TOUCH 35/40/45

Portable-type entry model in the SURFCOM TOUCH series useful in any measurement situation

Small and light tracing drivers selectable for application. In addition to horizontal surface, measurement on vertical surface with the driver and in narrow areas with transverse trace can be performed. Skid-measurement-type for measurement with different attitudes.



Palm-sized (Handy sized) tracing drivers selectable for workpieces and measurement areas



35 (Standard type)

The standard-type with different attitudes to measure horizontal, inclined, vertical and ceiling surfaces.



40 (Retraction type)

Retract-type that reduces damage to the stylus and pick-up by raising the pick-up while waiting for measurement or at ending. It can be used as a detector incorporated into an automatic machine.




45 (Horizontal tracing type)

The transverse trace-type where the pick-up moves sideways. Narrow areas, such as crankshaft pins and journals, that were difficult to measure before can now be measured.

A calibration table provided as standard accessory makes calibration work easy

A roughness specimen for surface texture and a driver selected above are set to the standard calibration table. Calibration can be conducted easily without need of height and inclination adjustment of the driver as before.

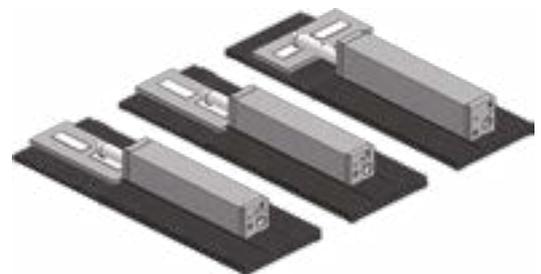

Optional pick-ups allow for various types of measurement

The pick-up, that comes in contact with the workpiece is replaceable. Various types of workpieces can be measured by using optional pick-ups such as those for small or extremely small holes, deep grooves, etc.



SURFCOM TOUCH

50

High-level compact-type model in the SURFCOM TOUCH series with high resolution and straightness

The skidless measurement-type with a high performing pick-up having high resolution and wide range. Various types of workpieces can be measured by changing the stylus for deep, long, or small holes or round surface.



Extended Z-axis measurement range from 800 to 1,000 μm (25% increase)



The high performing pick-up with a measurement range of 1,000 μm and a Z-axis minimum resolution of 0,0001 μm allows for wide-range and high resolution skidless measurement. No need to consider measurement range. In addition to flat surfaces, the roughness or waviness on undulating surfaces such as stepped or round surfaces can be evaluated with one trace. Levelling and zeroing before measurement can also be performed easily.



A compact high performing tracing driver

The portable compact size tracing driver for easy instalment has an X-axis measurement range of 50 mm, a straightness accuracy of 0.3 $\mu\text{m}/50$ mm, and a detector vertical movement volume of 50 mm.

Safe positioning at a constant speed is possible by operating the tracing driver in the X direction from the screen of the amplifier.

A handy-type driver can be attached


SURFCOM TOUCH 50 can be connected with a handy-type tracing driver*.

Measurement on vertical or ceiling surface and in narrow areas can be performed.




*Tracing driver attached to SURFCOM TOUCH 35/40/45, HANDYSURF E-35B/40A/45A, and SURFCOM FLEX-35B/40A/45A. An optional dedicated cable is required for connection.

Suited for measuring cylindrical workpieces. A tracing driver can be placed on workpieces by using an optional roll footing.

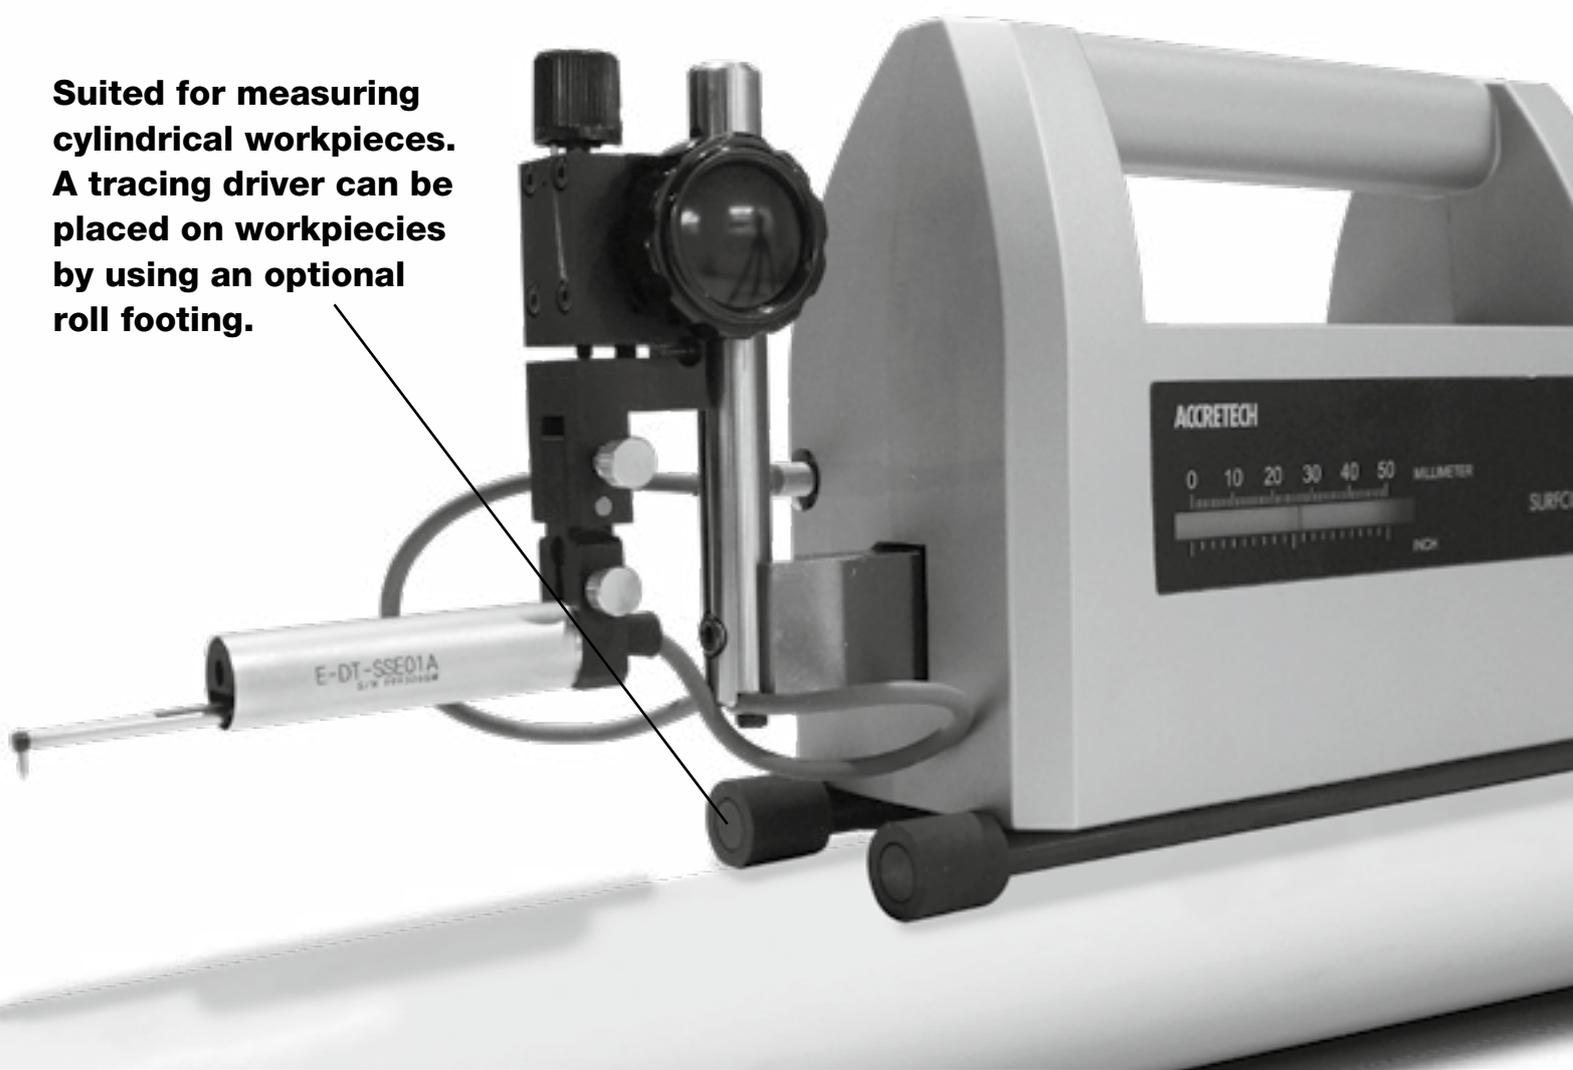

An optional compact measurement stand for measuring high workpieces or measuring with jigs.

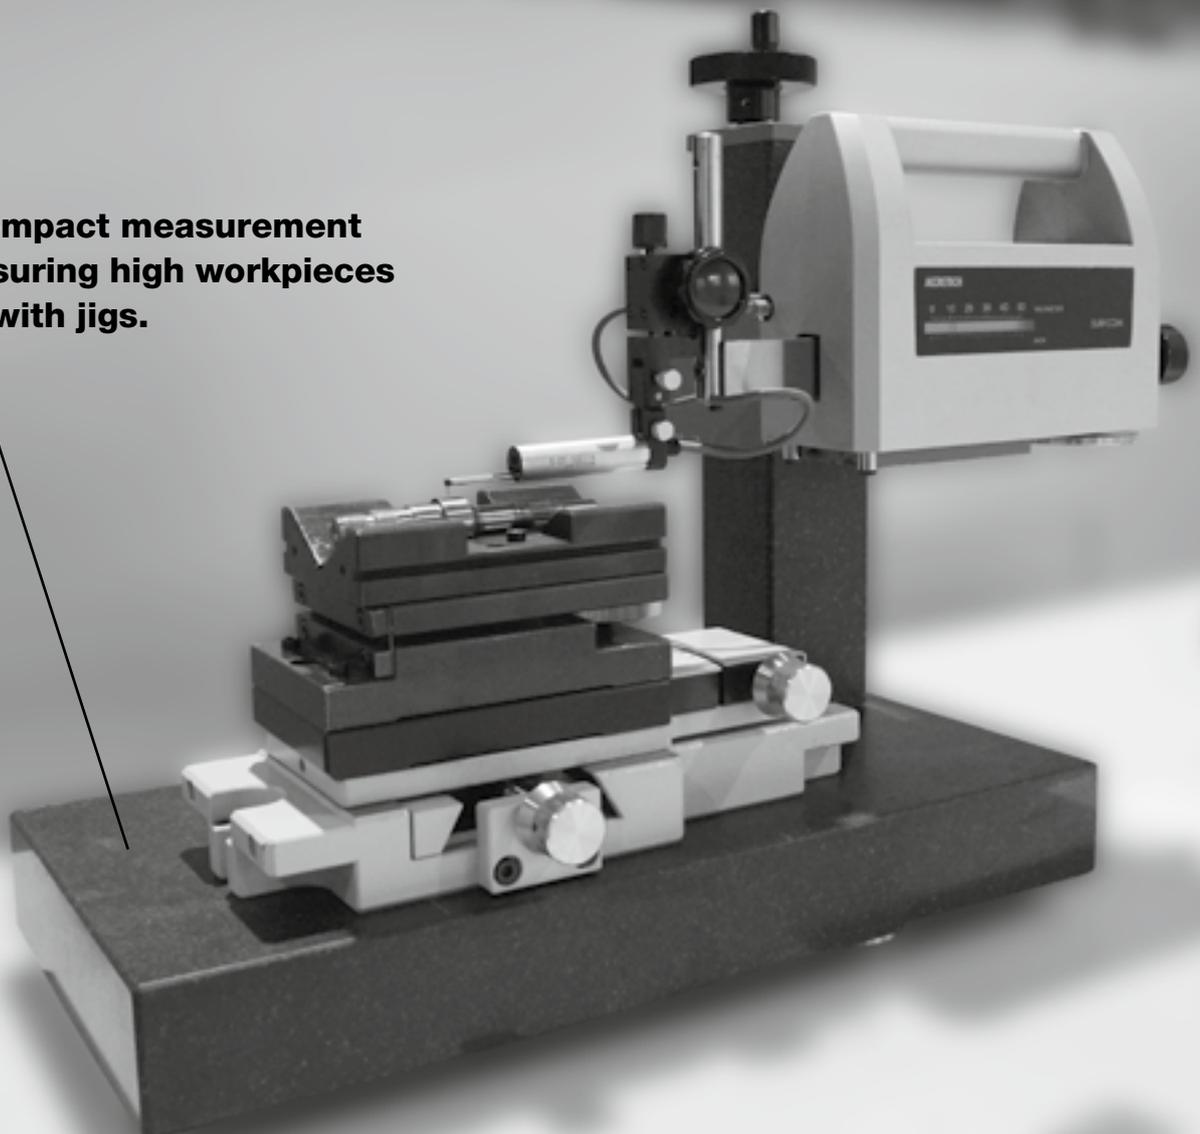



SURFCOM TOUCH 550

High-end model in the SURFOM TOUCH series with an electric column offering high accuracy and size variation

Equipped with a high performing pick-up having high resolution and wide range. It offers high flexibility where granite base size, column height, and X-axis drive range can be selected depending on needs.




Extended Z-axis measurement range from 800 to 1,000 μm (25% increase)



The high performing pick-up with a measurement range of 1,000 μm and a z-axis minimum resolution of 0,0001 μm allows for wide-range and high resolution skidless measurement. No need to consider measurement range. In addition to flat surfaces, the roughness or waviness on undulating surfaces such as stepped or round surfaces can be evaluated with one trace. Levelling and zeroing before measurement can also be performed easily.

Large-sized electric column

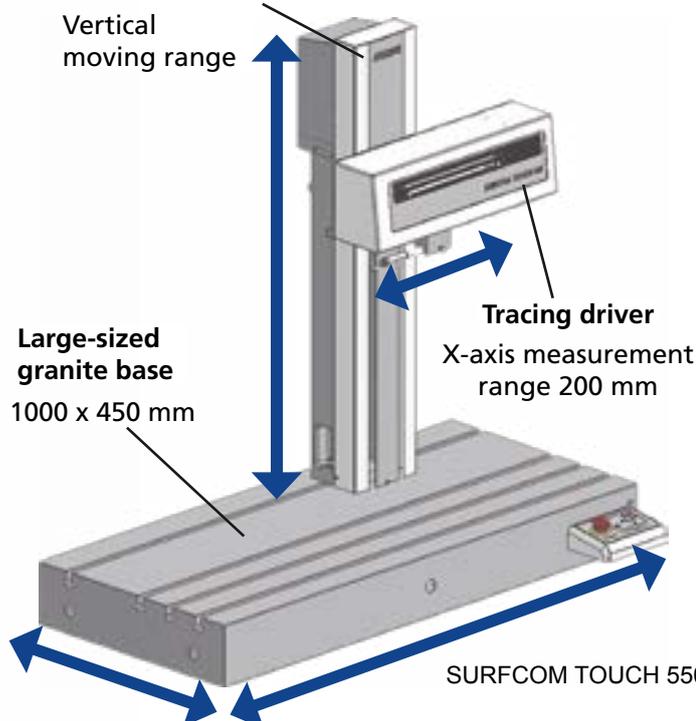

Size variations for various types of workpieces

SURFCOM TOUCH 550 allows users to select a combination of the size of the granite base, the height and type of the column and the drive range in the X axis direction. (refer to p.15)

This meets diverse customer needs such as "we want to reduce the installation space", "we want to reduce initial costs", "we want to measure high workpieces" and "we want to measure large flat workpieces".

SURFCOM TOUCH

Common Functions

Intuitive and easy-to-use screen for condition setting, calibration, measurement and analysis


An amplifier with a 7-inch wide touch panel and easy-to-use new interface provides higher operability. Easy-to-use operation eliminates the need of instructions.

Control screen of the driver




- It shows the level meter (Z) (contact level of the stylus with the workpiece), and horizontal (X) and vertical (C) positions of the tracing driver. (Z is shown on all models, X on TOUCH 50/550, C on TOUCH 550)
 - The pick-up can be moved horizontally and the tracing driver can be moved vertically from the screen. (TOUCH 50 can move the pick-up, and TOUCH 550 can move the pick-up and tracing driver)
- Two moving speeds are available for selection.

Main Screen

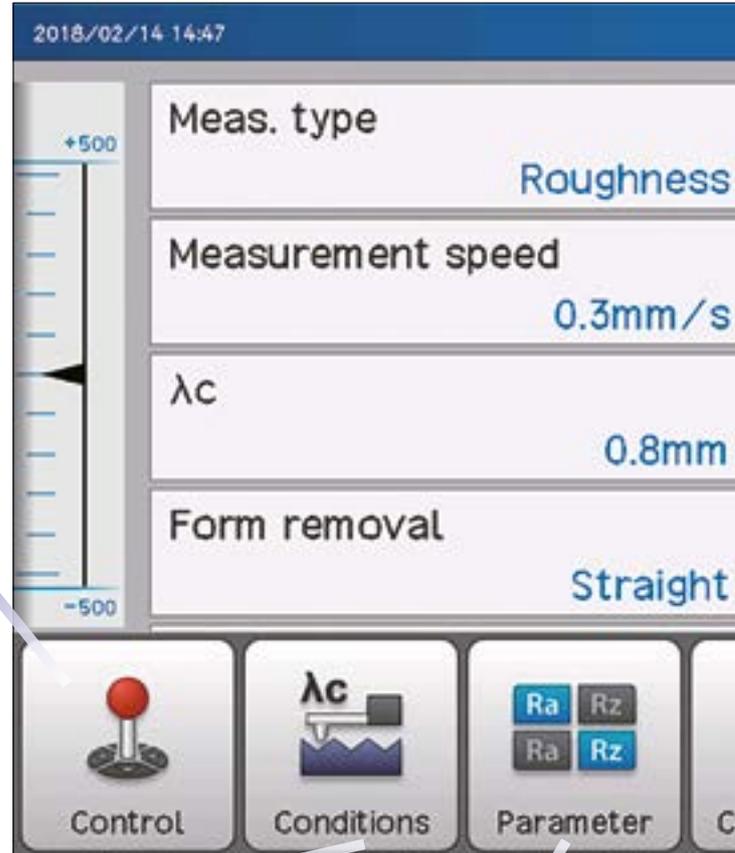

Setting Condition Screen

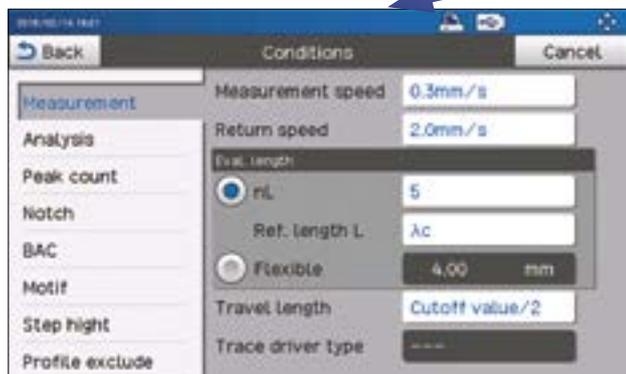


- Measurement/analysis conditions can be set.

Parameter Selection Screen




- Parameters to be evaluated in measurement can be selected.

Menu Screen

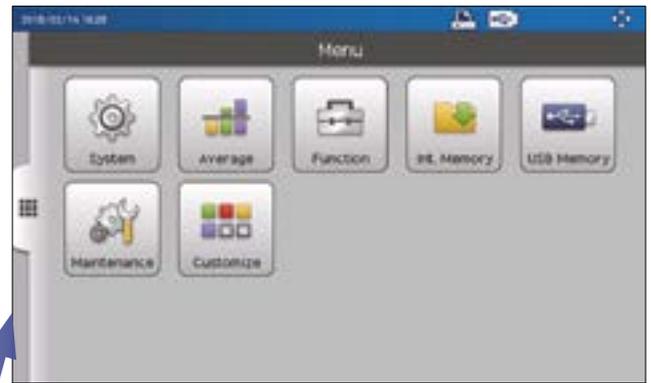

- Settings can be performed such as language, icon layout, management of internal/USB memories.

Output Item Screen

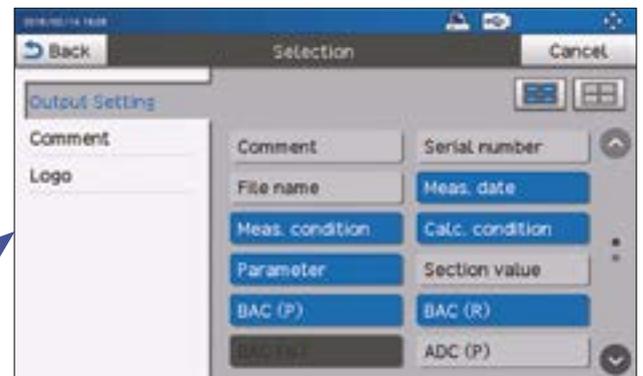


- Output items can be set for printing with the small printer attached to SURFCOM TOUCH*.

*Some TOUCH 35, 40, 45 and 50 types have no printer.



Calibration Screen

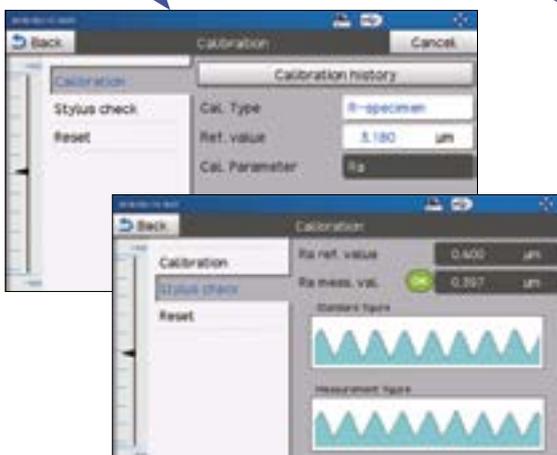

- Calibration can be performed before measurement.
- Any wear or chip of the stylus tip can be checked with the waveform and values.

Measurement Result Screen



- Measurement results are shown in waveform and selected parameters. Horizontal and vertical display magnification for waves can be changed intuitively with zoom-in or zoom-out by fingers. No need to specify magnification in number (although it is also possible).
- OK/NG is easily identified by setting acceptance/rejection criteria in advance.



SURFCOM TOUCH

Common Functions

Multi-language support available worldwide

20 Asian and European languages including Japanese, English and German are provided as standard. Language can be changed easily with one touch.



Supported Language




Display example in (simplified) Chinese




Display example in Japanese



Display example in Thai

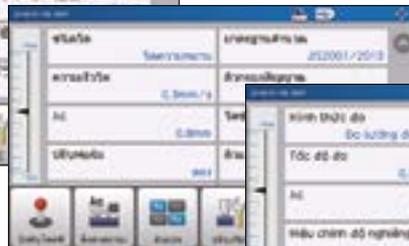

Display example in Vietnamese

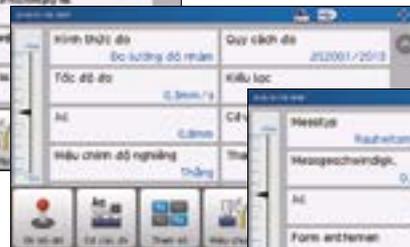


Display example in German



Easy-to-follow user's guide/quick reference guide

The user's guide is easy to understand like that for home appliances.

A quick reference guide showing basic operation procedures is also available so that users do not need to create written procedures.

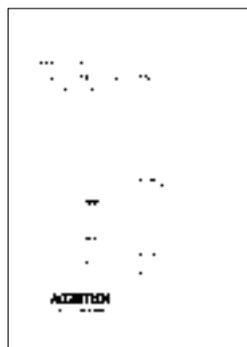


User's guide (left) and quick reference guide (right)

USB/micro USB ports as standard equipment

15 measurement conditions and 20 measurement results can be stored in the SURFCOM TOUCH amplifier. More conditions and results can be stored by connecting a USB memory to the standard USB port.

The amplifier is also equipped with a micro USB port. Measurement data can be transferred to the computer when connected with a USB cable, and a simple inspection report can be created using attached SupportWare II.

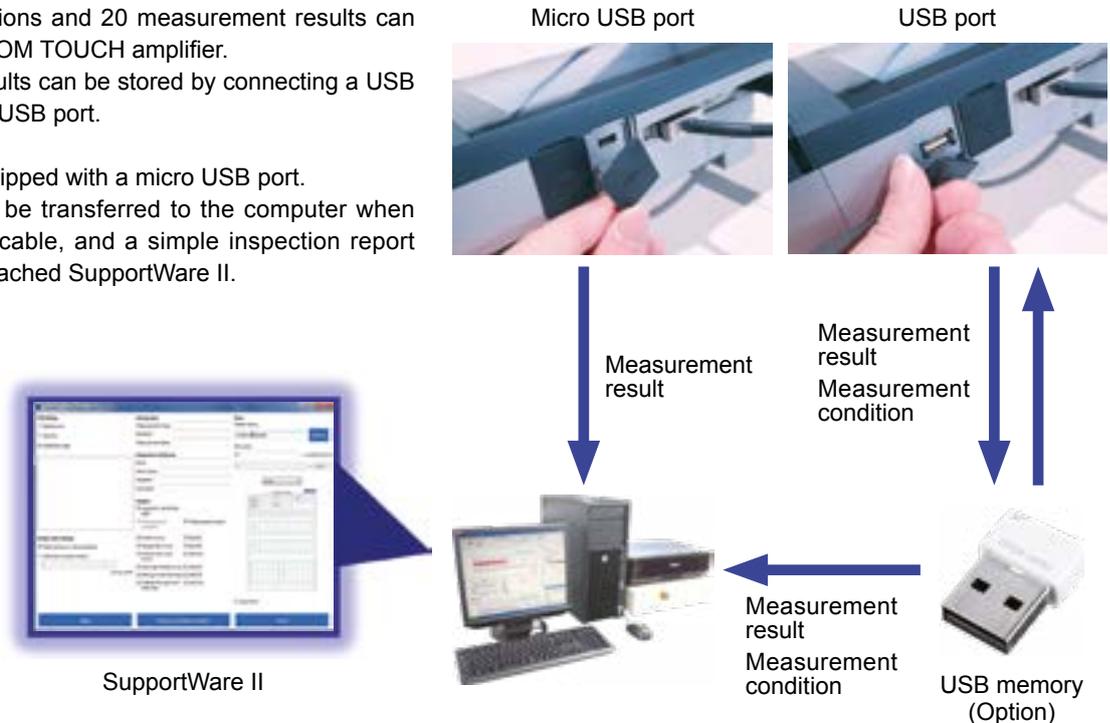

Measurement results can be printed quickly

The dedicated printer allows for quick printing of measurement results. Of course, any measurement data saved in the amplifier or USB memory can be output.

- TOUCH 550 has a built-in printer.
- TOUCH 35 to 50 have two models: with/without printer
Models without printer can be connected with an external printer unit.

Measurement results output example

ACCRETECH Ver.1.16 SURFCOM TOUCH 550		Roughness profile	
Comment	=	V-seg. =	2000 (AUTO)
Serial No.	=	H-seg. =	20 (AUTO)
File name	=	V-scaler	5µm/ 10µm
Date	= 18. 02. 16	H-scaler	500µm/ 10µm
Time	= 16: 09: 53		
Roughness measurement (JIS2001/2013)			
Eval. length	= 4. 00mm		
Sampl. length	= λ/c		
Meas. speed	= 0. 30mm/s		
λ/c	= 0. 8mm		
Cutoff type	= Gaussian		
Meas. range	= ±500. 0µm		
Form removal	= Straight		
As	= 2. 5µm		
Polarity inv.	= OFF		
Pickup Type	= Standard		

TOUCH 550



With a built-in printer

TOUCH 35 to 50



Printer-equipped model



Model without printer



Model without printer and a printer unit (optional)

SURFCOM TOUCH 35/40/45 Specifications

Model		SURFCOM TOUCH					
		35		40		45	
		Tip radius 5 μm	Tip radius 2 μm	Tip radius 5 μm	Tip radius 2 μm	Tip radius 5 μm	
Measurement range	Z direction	-210 to +160 μm					
	Drive axis	X direction 16 mm				Y direction 4 mm	
Tracing driver	Movement type	Standard type			Retraction type		
	Evaluation length	0.2 to 16 mm					
	Measurement speed	0.5, 0.6, 0.75, 1.0 mm/s				0.6 mm/s	
Pick-up	Sensing type	Differential inductance					
	Measurement method	Skid					
	Z direction resolution	0.0007 $\mu\text{m}/210$ to 160 μm					
	Model	E-DT-SM10A	E-DT-SM49A	E-DT-SM10A	E-DT-SM49A	E-DT-SM39A	
	Stylus	Measurement force	4 mN		0.75 mN		
		Tip radius	$r_{\text{tip}} = 5 \mu\text{m}$	$r_{\text{tip}} = 2 \mu\text{m}$	$r_{\text{tip}} = 5 \mu\text{m}$	$r_{\text{tip}} = 2 \mu\text{m}$	$r_{\text{tip}} = 5 \mu\text{m}$
Tip angle		90° cone		60° cone			
Tip material		Diamond					
Analysis item	Calculation standards	Comply with JIS2013/2001, JIS1994, JIS1982, ISO1997/2009, ISO13565, DIN1990, ASME2002/2009, ASME1995, CNOMO, ISO 21920					
	Parameter	Profile curve	Pa, Pq, Pp, Pv, Pc, PSm, P Δ q, PPc, Psk, Pku, Pt, Pmr(c), Pmr, P δ c, Rz82, TILTA, AVH, Hmax, Hmin, AREA, Rmax, Rz, Sm, Δ a, Δ q, λ a, λ q, Lr, Rsk, Rku, Rk, Rpk, Rvk, Mr1, Mr2, Vo, K, tp, tp2, Hp				
		Roughness curve	Ra, Rq, Rz, Rv, Rc, Rt, RSm, R Δ q, Rsk, Rku, Rmr(c), Rmr, R δ c, Rz94, R3z, R Δ a, R λ a, R λ q, Ry, Lr, Sm, S, tp, tp2, PC, RPc ISO, RPc EN, Pc, PPI, Rp, Rmax, Rz.l, RS, Rmr2, Mr1, Mr2, Rpk, Rvk, Rk, Vo, K, A1, A2, Rpm, Δ a, Δ q, Htp				
		Motif	R, Rx, AR, W, Wx, AW, Rke, Rpk, Rvke, NCRX, NR, CPM, SR, SAR, Wte, NW, SAW, SW, Mr1e, Mr2e, Vo, K				
	Evaluation curve	Profile curve, roughness curve, ISO13565 special roughness curve, roughness motif curve, waviness motif curve, upper envelope waviness curve					
Characteristics graph	Abbot curve, amplitude density function, power graph						
Filter	Filter type	Gaussian, 2RC (phase compensation), 2RC (non-phase compensation)					
	Cut-off value	Ac	0.08, 0.25, 0.8, 2.5 mm				
		As	None, 2.5, 8, 25 μm				
Amplifier	Display	7-inch colour liquid crystal touch panel					
	Data output	USB connectors for USB memory : x 2 (model without printer), x 1 (model with printer), Micro USB connector for USB communication x 1					
	Print output	Standard function for models with printer and optional for models without printer (external printer unit)/Thermal recording paper width: 58 mm (recording width: 48 mm)					
	Language	Japanese, English, Chinese (Traditional Chinese/Simplified Chinese), Korean, Thai, Malay, Vietnamese, Indonesian, German, French, Italian, Czech, Polish, Hungarian, Turkish, Swedish, Dutch, Spanish, Portuguese					
Specifications	Power supply	Charging	Built-in battery (to be charged using AC adaptor), charging period: 3 hours (about 600 measurements can be take when fully charged)				
		Power supply	AC100 to 240 V \pm 10%, 50/60 Hz, single phase				
	Power consumption	Maximum 80VA					
	External dimensions (W x D x H)/Weight	Printer-equipped model	Amplifier: 320 x 167 x 44 mm/about 2 kg for the entire system				
		Models without printer	Amplifier: 252 x 167 x 44 mm/about 1.6 kg for the entire system				
Standard accessories	Roughness specimen (E-MC-S24C), calibration table (E-WJ-S1045A), touch pen (E-MA-S112A), printing paper (E-CH-S25A)*1, instruction manuals, SupportWare II nose-piece (V-type) (E-WJ-S536A)*2						

*1 For models with printer only

*2 For SURFCOM TOUCH 45 only

SURFCOM TOUCH 50 Specifications

Model		SURFCOM TOUCH			
		50			
Measurement range	Z direction	\pm 500 μm			
	X direction	50 mm			
Tracing driver	Evaluation length	0.1 to 50 mm			
	Straightness accuracy	0.3 $\mu\text{m}/50$ mm			
	Detector vertical movement volume	50 mm			
	Measurement Speed	0.15, 0.3, 0.6, 1.5, 3 / 0.05, 0.1, 0.2, 0.5, 1 mm/s (switching)			
Pick-up	Sensing type	Differential inductance			
	Measurement method	Skidless/Skid (optional)			
	Z direction resolution	0.0001 $\mu\text{m}/\pm$ 40 μm , 0.00125 $\mu\text{m}/\pm$ 500 μm			
	Stylus (standard accessory)	Model	DM43801		
		Measurement force	0.75 mN		
Radius		$r_{\text{tip}} = 2 \mu\text{m}$			
Angle		60° cone			
Material	Diamond				
Analysis item	Calculation standards	Comply with JIS2013/2001, JIS1994, JIS1982, ISO1997/2009, ISO13565, DIN1990, ASME2002/2009, ASME1995, CNOMO, ISO 21920			
	Parameter	Profile curve	Pa, Pq, Pp, Pv, Pc, PSm, P Δ q, PPc, Psk, Pku, Pt, Pmr(c), Pmr, P δ c, Rz82, TILTA, AVH, Hmax, Hmin, AREA, Rmax, Rz, Sm, Δ a, Δ q, λ a, λ q, Lr, Rsk, Rku, Rk, Rpk, Rvk, Mr1, Mr2, Vo, K, tp, tp2, Hp		
		Roughness curve	Ra, Rq, Rz, Rv, Rc, Rt, RSm, R Δ q, Rsk, Rku, Rmr(c), Rmr, R δ c, Rz94, R3z, R Δ a, R λ a, R λ q, Ry, Lr, Sm, S, tp, tp2, PC, RPc ISO, RPc EN, Pc, PPI, Rp, Rmax, Rz.l, RS, Rmr2, Mr1, Mr2, Rpk, Rvk, Rk, Vo, K, A1, A2, Rpm, Δ a, Δ q, Htp		
		Waviness profile curve	Wa, Wq, Wt, Wp, Wv, WSm, WPC, Wsk, Wmr(c), Wmr, W δ c, Wz, Wc, Wku, W Δ q, WEM, WEA, WE-a, WE-q, WE-p, WE-v, WE-Sm, WEC-q, WEC-m, WEC-p, WEC-v, WEC-Sm		
		Motif	R, Rx, AR, W, Wx, AW, Rke, Rpk, Rvke, NCRX, NR, CPM, SR, SAR, Wte, NW, SAW, SW, Mr1e, Mr2e, Vo, K		
	Evaluation curve	Profile curve, roughness curve, filtered waviness curve, waviness profile curve, ISO13565 special roughness curve, roughness motif curve, waviness motif curve, upper envelope waviness curve, rolling circle waviness curve			
Characteristics graph	Abbot curve, amplitude density function, power graph				
Filter	Filter type	Gaussian, 2RC (phase compensation), 2RC (non-phase compensation)			
	Cut-off value	Ac	0.08, 0.25, 0.8, 2.5, 8, 25 mm		
		As	None, 2.5, 8, 25 μm		
Amplifier	Display	7-inch colour liquid crystal touch panel			
	Data output	USB connectors for USB memory : x 2 (model without printer), x 1 (model with printer), Micro USB connector for USB communication x 1			
	Print output	Standard function for models with printer and optional for models without printer (external printer unit)/Thermal recording paper width: 58 mm (recording width: 48 mm)			
	Language	Japanese, English, Chinese (Traditional Chinese/Simplified Chinese), Korean, Thai, Malay, Vietnamese, Indonesian, German, French, Italian, Czech, Polish, Hungarian, Turkish, Swedish, Dutch, Spanish, Portuguese			
Specifications	Power supply	Charging	Built-in battery (to be charged using AC adaptor), charging period: 3 hours (about 600 measurements can be take when fully charged)		
		Power supply	AC100 to 240 V \pm 10%, 50/60 Hz, single phase		
	Power consumption	Maximum 80 VA			
	External dimensions (W x D x H)/Weight	Printer-equipped model	Amplifier: 320 x 167 x 44 mm/about 4.2 kg for the entire system		
		Models without printer	Amplifier: 252 x 167 x 44 mm/about 3.8 kg for the entire system		
Standard accessories	Roughness specimen (E-MC-S24C), touch pen (E-MA-S112A), printing paper (E-CH-S25A)*1, instruction manuals, SupportWare II				

*1 For models with printer only

SURFCOM TOUCH 550 Specifications


Model		SURFCOM TOUCH									
		550									
		-11	-12	-13	-14	-21	-22	-23	-24		
Measurement range	Z direction	±500 µm									
	X direction	100 mm				200 mm					
Tracing driver	Drive distance	100 mm				200 mm					
	Straightness accuracy	(0.05 + 1.5L/1000) µm (L: measurement length (mm))									
	Speed	0.03, 0.06, 0.15, 0.3, 0.6, 1.5, 3, 6 / 0.05, 0.1, 0.2, 0.5, 1, 2, 5 mm/s (switching) to 3 mm/s (when operating the amplifier touch panel), to 6 mm/s (when using the joystick)									
Pick-up	Sensing type	Differential inductance									
	Measurement method	Skidless/Skid (optional)									
	Z direction resolution	0.0001 µm/±40 µm, 0.00125 µm/±500 µm									
	Stylus (standard accessory)	Model	DM43801								
		Measurement force	0.75 mN								
		Radius	r _{tip} = 2 µm								
Angle		60° cone									
Material	Diamond										
Measurement stand	Column	Drive distance	250 mm		450 mm		250 mm		450 mm		
		Moving speed	-- (Manual)	to 3 mm/s (when operating the amplifier touch panel), to 10 mm/s (when using the joystick)			-- (Manual)	to 3 mm/s (when operating the amplifier touch panel), to 10 mm/s (when using the joystick)			
	Base	Size	600 mm x 317 mm			1000 mm x 450 mm		600 mm x 317 mm		1000 mm x 450 mm	
		Material	Granite								
Maximum allowable load weight*1		Approx. 48 kg	Approx. 42 kg	Approx. 33 kg	Approx. 48 kg	Approx. 43 kg	Approx. 37 kg	Approx. 28 kg	Approx. 43 kg		
Analysis item	Calculation standards		Comply with JIS2013/2001, JIS1994, JIS1982, ISO1997/2009, ISO13565, DIN1990, ASME2002/2009, ASME1995, CNOMO, ISO 21920								
	Parameter	Profile curve	Pa, Pq, Pp, Pv, Pc, PSm, PΔq, PPc, Psk, Pku, Pt, Pmr(c), Pmr, Pδc, Rz82, TILTA, AVH, Hmax, Hmin, AREA, Rmax, Rz, Sm, Δa, Δq, Δa, Δq, Lr, Rsk, Rku, Rk, Rpk, Rvk, Mr1, Mr2, Vo, K, tp, tp2, Hp								
		Roughness curve	Ra, Rq, Rz, Rv, Rc, Rt, RSm, RΔq, Rsk, Rku, Rmr(c), Rmr, Rδc, Rz94, Rz3z, RΔa, RΔa, RΔq, Ry, Lr, Sm, S, tp, tp2, PC, RPe JIS, RPe ISO, RPe EN, Pc, PPI, Rp, Rmax, Rz.l, RS, Rmr2, Mr1, Mr2, Rpk, Rvk, Rk, Vo, K, A1, A2, Rpm, Δa, Δq, Htp								
		Waviness profile curve	Wa, Wq, Wt, Wp, Wv, WSm, WPC, Wsk, Wmr(c), Wmr, Wδc, Wz, Wc, Wku, WΔq, WEM, WEA, WE-a, WE-q, WE-p, WE-v, WE-Sm, WEC-q, WEC-m, WEC-v, WEC-Sm								
		Motif	R, Rx, AR, W, Wx, AW, Rke, Rpk, Rvke, NCRX, NR, CPM, SR, SAR, Wte, NW, SAW, SW, Mr1e, Mr2e, Vo, K								
	Evaluation curve		Profile curve, roughness curve, filtered waviness curve, waviness profile curve, ISO13565 special roughness curve, roughness motif curve, waviness motif curve, upper envelope waviness curve, rolling circle waviness curve								
Characteristics graph		Abbot curve, amplitude density function, power graph									
Filter	Filter type		Gaussian, 2RC (phase compensation), 2RC (non-phase compensation)								
	Cut-off value	Ac	0.08, 0.25, 0.8, 2.5, 8, 25 mm								
		As	None, 2.5, 8, 25 µm								
Amplifier	Display	7-inch colour liquid crystal touch panel									
	Data output	USB connector for USB memory x 1, Micro USB connector for USB communication x 1									
	Print output	Standard function/Thermal recording paper width: 58 mm (recording width: 48 mm)									
	Language	Japanese, English, Chinese (Traditional Chinese/Simplified Chinese), Korean, Thai, Malay, Vietnamese, Indonesian, German, French, Italian, Czech, Polish, Hungarian, Turkish, Swedish, Dutch, Spanish, Portuguese									
Specifications	Power supply	AC100 to 240 V±10%, 50/60 Hz, single phase, D-type grounding									
	Power consumption	Maximum 110 VA									
	External dimensions (W x D x H)/Weight	Measurement unit: See the external view below. Amplifier: 340 x 214.5 x 139.5 mm/about 4.1 kg									
Standard accessories		Roughness specimen (E-MC-S24C), levelling adjustment table (E-AT-S02A), touch pen (E-MA-S112A), printing paper (E-CH-S25A), instruction manuals, SupportWare II									

*1 This maximum allowable load weight is for the case when using the optional anti-vibration table (E-VS-S57B for -11, -12, -13, -21, -22, -23 system, and E-VS-R16B for -14, -24 system)

SURFCOM TOUCH 550 External view

Model	Dimension of the main body (mm)				Measurement range(mm)		Base (mm)			Weight (kg)			
	Maximum Width	Depth	Height	Column height	X axis (tracing driver)	C axis (column)	Width	Depth	Base height	Column set position	Weight of main body	Maximum load weight*	
SURFCOM TOUCH 550	-11	610	481	667	552	100	250	600	317	115	(140)	89	48
	-12	610	481	738	623	100	250	600	317	115	(140)	95	42
	-13	610	481	938	823	100	450	600	317	115	(140)	104	33
	-14	1000	586	963	823	100	450	1000	450	140	(240)	209	48
	-21	670	481	667	552	200	250	600	317	115	(140)	94	43
	-22	670	481	738	623	200	250	600	317	115	(140)	100	37
	-23	670	481	938	823	200	450	600	317	115	(140)	109	28
-24	1000	586	963	823	200	450	1000	450	140	(240)	214	43	

* This maximum load weight is for the case when using the optional anti-vibration table (E-VS-S57B for -11/12/13/21/22/23 system, and E-VS-R16B for -14/24 system)

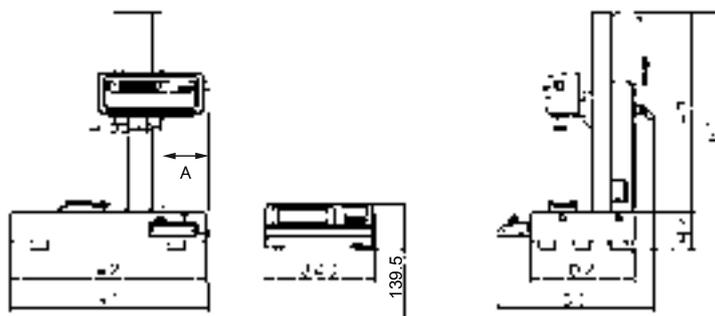



Together with our partners, we are able to offer you a Europe-wide sales and service network. Through the regional proximity, a service technician can reach your premises without any prolonged wait and travel times. If you have any questions, please contact us directly from all European countries through our centralized metrology phone number or email address:



+44 2476 651 774

Mon – Fri from 8:30 a.m. to 5:00 p.m.



info@accretech.eu

Germany

ACCRETECH (Europe) GmbH
Felix-Wankel-Straße 6
73760 Ostfildern
www.accretech.eu
E-Mail info@accretech.eu
Phone +49 711 25 279 000

Austria

ACCRETECH (Europe) GmbH
Landsberger Str. 396
81241 Munich
www.accretech.eu
E-Mail info@accretech.eu
Phone +49 89 250 064 200

Switzerland

Osterwalder Messtechnik AG
Sumpfstraße 13
6312 Steinhausen
www.osterwalder-messtechnik.ch
E-Mail info@osterwalder-zug.ch
Phone +41 417 481 919

Italy

ACCRETECH (Europe) GmbH
Via Giotto 7
20032 Cormano
www.accretech.eu
E-Mail info@accretech.eu
Phone +39 02 2316 3291

France

ACCRETECH (Europe) GmbH
14 Chemin des Clos
38240 Meylan
www.accretech.eu
E-Mail info@accretech.eu
Phone +33 476 0440 80

United Kingdom

ACCRETECH SBS UK Ltd.
Unit 2, Leofric Court
Progress Way, Coventry CV3 2NT
www.accretech.eu
E-Mail info@accretech.eu
Phone +44 2476 651 774

Ireland

ACCRETECH SBS UK Ltd.
Unit 2, Leofric Court
Progress Way, Coventry CV3 2NT
www.accretech.eu
E-Mail info@accretech.eu
Phone +44 2476 651 774

Denmark

ACCRETECH SBS UK Ltd.
Unit 2, Leofric Court
Progress Way, Coventry CV3 2NT
www.accretech.eu
E-Mail info@accretech.eu
Phone +44 2476 651 774

Sweden

ACCRETECH SBS UK Ltd.
Unit 2, Leofric Court
Progress Way, Coventry CV3 2NT
www.accretech.eu
E-Mail info@accretech.eu
Phone +44 2476 651 774

Norway

ACCRETECH SBS UK Ltd.
Unit 2, Leofric Court
Progress Way, Coventry CV3 2NT
www.accretech.eu
E-Mail info@accretech.eu
Phone +44 2476 651 774

Finland

ACCRETECH SBS UK Ltd.
Unit 2, Leofric Court
Progress Way, Coventry CV3 2NT
www.accretech.eu
E-Mail info@accretech.eu
Phone +44 2476 651 774

Netherlands

ACCRETECH (Europe) GmbH
14 Chemin des Clos
38240 Meylan
www.accretech.eu
E-Mail info@accretech.eu
Phone +33 476 0440 80

Spain

Izasa Scientific S.L.U.
C/Jesus Serra Santamans, 5. Polígono
Industrial Can Sant Joan
08174 Sant Cugat del Vallès
Barcelona
www.izasascientific.com
E-Mail izasa@izasascientific.com
Phone +34 900 81 00 61

Portugal

Izasa Scientific, LDA
Avenida do Forte n° 6
Edifício Ramazzotti – 3° Piso 2.24
2790-072 Carnaxide, Lisboa
www.izasascientific.com
E-Mail izasapt@izasascientific.com
Phone +351 800 787 888

Poland

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Hungary

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Bulgaria

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Romania

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Slovakia

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Slovenia

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Czech Republic

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Turkey

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Serbia

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

We reserve the right to change the contents of this catalog, including product specifications, without notice when products are updated. Some of our products shall be controlled by the Foreign Exchange and Foreign Trade Act, and required an export license by the Japanese Government. Regarding exporting the products and/or providing a non-resident with technologies, please consult ACCRETECH (Tokyo Seimitsu).



EUROPE

ACCRETECH (Europe) GmbH
Landsberger Str. 396, 81241 Munich, Germany
Phone +49 89 2500 64-200, Fax +49 89 2500 64-210
info@accretech.eu
www.accretech.eu