




HANDYSURF+
35 | 40 | 45

New HANDYSURF⁺, reborn with sophisticated design
Portable surface texture measuring instrument for global use
responding to diverse everyday needs

HANDYSURF⁺ **NEW**



Resolution 0.0007 μm
Measuring range
+160 μm ~ -210 μm




High resolution with wide measuring range,
no need to set up measuring range

The previous HANDYSURF required setting of a narrow measuring range when measuring with a high resolution, but HANDYSURF+ has evolved! The instrument has the Z direction measuring range of **370 μm** , which is the widest in class, and achieved a resolution as high as **0.0007 μm** over the entire range.



Compact Printer
(Option)

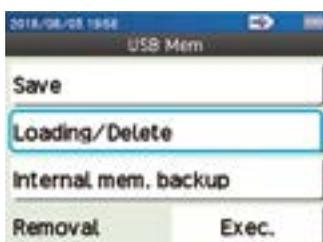

By connecting to the USB memory stick (option), it is possible to save and read measurement conditions and results.

Connectable to the compact printer, USB memory stick and PC with built-in USB connector

With the USB connector, it is possible to print measurement results to the optional compact printer, save measurement conditions and results on USB memory sticks and recharge the instrument from the USB port of a PC or with a USB battery.




Select from 3 HANDYSURF⁺ driver units, according to workpiece and measurement location




35 (Standard type)

The standard-type measurable with different attitudes including horizontal, inclined, vertical and ceiling surfaces.



40 (Retract type)

Retract-type that reduces damage to the stylus and pickup by raising the pickup while waiting for measurement or at ending. It can be used as a detector incorporated into an automatic machine.



45 (transverse trace-type)

The transverse trace-type where the pickup moves sideways. Narrow areas, such as crankshaft pins and journals, that were difficult to measure before can now be measured.

Nose Piece for Flat Surfaces / Cylinders (Option)



1



2



3

1. Nose Piece for Flat Surfaces E-WJ-S88A
2. Nose Piece for Cylinders E-WJ-S85A
3. Flat or cylindrical surfaces too small for measuring can be easured by holding the instrument in hand.

Usage example of magnetic stand (Option)



Magnet stand E-ST-MAC
Post-mount E-CS-S26A
Post-mount holder 0102050

Superior Operability




1.



2.



3.

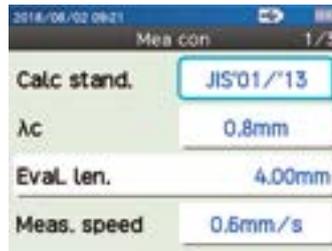


4.

2.4 inch color LCD has significantly improved the visibility.

Moreover, 6 buttons and newly developed UI have achieved simple and intuitive operations.

1. Color LCD
2. Menu screen
3. Home screen
4. Measurement condition setting display


Multiple analysis capabilities

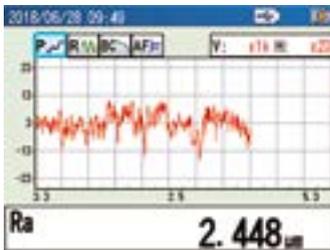


1.



2.

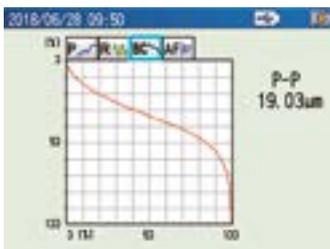

3.

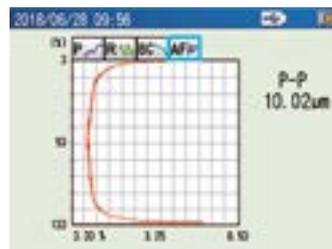


4.

Graphic representation of measurement results enables their on-site verification with parameter and waveform. Moreover, despite being a portable instrument, it is capable of a variety of analyses including analyses of BAC, ADC, peak count and motifs. By setting the conditions in advance, OK/NG judgment can be performed automatically.

1. Example of surface roughness (Ra) measurement
2. Example of OK/NG judgment of measurement result
3. Example of BAC analysis
4. Example of ADC analysis

Multiple options responding to various situations

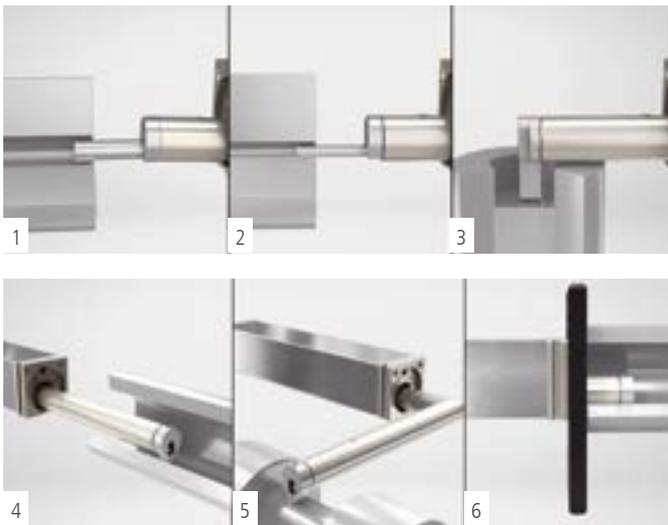

1. Pickup for fine hole
2. Pickup for extra fine hole
3. Pickup for deep groove
4. Long hole extension
5. Adapter for horizontal
6. Adapter for bore measurement
E-WJ-S86A

Calibration Plate



HANDYSURF⁺ 35/40



HANDYSURF⁺ 45

A standard specimen for surface texture and a driver selected are set to the standard calibration plate. Calibration can be conducted easily without need of height and inclination adjustment of the driver as before.



User's Guide / Quick Reference



User's guide (left) and Quick Reference (right)

An easy-to-understand user's guide, as with general home appliances, is in the CD-ROM. A quick reference with the summary of basic operating procedure is also included in the package both on paper and as data in the CD-ROM so that users do not need to create written procedures.

Specifications

Name	Model	External view	Specifications	Remarks
Pickup	E-DT-SM10A		Rtip 5 μm, 90°conical diamond, 4 mN (For 35-40)	• For general measurement • Standard accessory
	E-DT-SM49B		Rtip 2 μm, 60°conical diamond, 0.75 mN (For 35-40)	
	E-DT-SM39A		Rtip 5 μm, 90°conical diamond, 4 mN (For 45)	
	E-DT-SM11B		Rtip 5 μm, 90°conical diamond, 4 mN (For 35-40)	• For fine hole • Min. inner diameter: Φ 5 mm
	E-DT-SM50B		Rtip 2 μm, 60°conical diamond, 0.75 mN (For 35-40)	
	E-DT-SM12A		Rtip 5 μm, 90°conical diamond, 4 mN (For 35-40)	• For extra fine hole • Min. inner diameter: Φ 3 mm
	E-DT-SM51B		Rtip 2 μm, 60°conical diamond, 0.75 mN (For 35-40)	
	E-DT-SM13A		Rtip 5 μm, 90°conical diamond, 4 mN (For 35-40)	• For deep groove • Max. depth: 7 mm
E-DT-SM52B	Rtip 2 μm, 60°conical diamond, 0.75 mN (For 35-40)			

Name	Model	External view	Specifications	Remarks
Magnetic stand	E-ST-MAC			
Post mount holder	010 2050			
Post mount	E-CS-S26A			• For Φ 6
Adapter for height gage	E-WJ-S93A			Cross-section surface on scriber of height gage: 9 mm x 9 mm

 Standard inventory parts

Model		HANDYSURF ⁺					
		35		40		45	
		Tip radius 5 μm	Tip radius 2 μm	Tip radius 5 μm	Tip radius 2 μm	Tip radius 5 μm	
Measurement range	Z direction	-210 to +160 μm					
	Drive axis	X direction 16 mm				Y direction 4 mm	
Tracing Driver	Movement type	Standard type			Retraction type		
	Evaluation Length	0.2 to 16 mm					
	Measurement speed	0.5, 0.6, 0.75, 1.0 mm/s					
Pickup	Sensing type	Differential inductance					
	Measurement Method	Skid					
	Z direction resolution	0.0007 μm/-210 to +160 μm					
	Model	E-DT-SM10A	E-DT-SM49A	E-DT-SM10A	E-DT-SM49A	E-DT-SM39A	
	Stylus	Measurement force	4 mN	0.75 mN	4 mN	0.75 mN	4 mN
		Tip radius	r _{tip} = 5 μm	r _{tip} = 2 μm	r _{tip} = 5 μm	r _{tip} = 2 μm	r _{tip} = 5 μm
Tip angle		90°cone	60°cone	90°cone	60°cone	90°cone	
tip material		Diamond					
Analysis item	Calculation Standards	Comply with JIS2013/2001, JIS1994, JIS1982, ISO1997/2009, ISO13565, DIN1990, ASME2002/2009, ASME1995, CNOMO, ISO21920					
	Parameter	Profile Curve	Pt, Rmax, Rz, Rk, Rpk, Rvk, Mr1, Mr2, Vo, K, tp				
		Roughness Curve	Ra, Rq, Rz, Rv, Rc, Rt, RSm, RΔq, Rsk, Rku, Rmr(c), Rmr, Rδc, Rz94, R3z, RΔa, Ry, Sm, S, tp, PC, R _{Pc} JIS, R _{Pc} ISO, R _{Pc} EN, P _c , P _{PI} , R _p , R _{max} , Mr1, Mr2, R _{pk} , R _{vk} , R _k , V _o , K, A1, A2, R _{pm} , Δa, Δq, H _{tp}				
		Motif	R, Rx, AR, W, Wx, AW, R _{ke} , R _{pke} , R _{vke} , NCRX, NR, CPM, SR, SAR, Wte, NW, SAW, SW, Mr1e, Mr2e, Vo, K				
Evaluation Curve	Profile Curve, Roughness Curve, ISO13565Special Roughness Curve, Roughness motif curve, Waviness motif curve, Upper envelope waviness curve						
Characteristics graph		Bearing area curve, Amplitude distribution curve					
Filter	Filter type	Gaussian, 2RC (phase compensation), 2RC (non-phase compensation)					
	Cutoff value	λc	0.08, 0.25, 0.8, 2.5 mm				
		λs	None, 2.5, 8 μm				
Amplification indicator	Display	2.4-inch color liquid crystal panel					
	Data output	USB connectors for USB memory/printer connection x 1, Micro USB connector for USB communication x 1					
	Print output	Optional (external printer unit) / Thermal recording paper width: 58 mm (recording width: 48 mm)					
	Language	English, German, French, Italian, Spanish, Portuguese, Czech, Polish, Hungarian, Turkish, Swedish, Dutch, Japanese, Chinese (Traditional Chinese/Simplified Chinese), Korean, Thai, Malay, Vietnamese, Indonesian,					
Specifications	Power Supply	Charging	Built-in battery (to be charged using AC adaptor, PC USB port, USB battery), charging period: 4 hours (about 1000 measurements can be take when fully charged)				
		Voltage, frequency	AC100 to 240 V ±10%, 50/60 Hz, Single phase (Included AC adaptor)				
		Power consumption	Maximum 10 W				
	External dimensions (W x D x H) / Weight		Amplification indicator: 184.5 x 68 x 57.4 mm/about 500 g for the entire system				



Together with our partners, we are able to offer you a Europe-wide sales and service network. Through the regional proximity, a service technician can reach your premises without any prolonged wait and travel times. If you have any questions, please contact us directly from all European countries through our centralized metrology phone number or email address:



+44 2476 651 774

Mon – Fri from 8:30 a.m. to 5:00 p.m.



info@accretech.eu

Germany

ACCRETECH (Europe) GmbH
Felix-Wankel-Straße 6
73760 Ostfildern
www.accretech.eu
E-Mail info@accretech.eu
Phone +49 711 25 279 000

Austria

ACCRETECH (Europe) GmbH
Landsberger Str. 396
81241 Munich
www.accretech.eu
E-Mail info@accretech.eu
Phone +49 89 250 064 200

Switzerland

Osterwalder Messtechnik AG
Sumpfstraße 13
6312 Steinhausen
www.osterwalder-messtechnik.ch
E-Mail info@osterwalder-zug.ch
Phone +41 417 481 919

Italy

ACCRETECH (Europe) GmbH
Via Giotto 7
20032 Cormano
www.accretech.eu
E-Mail info@accretech.eu
Phone +39 02 2316 3291

France

ACCRETECH (Europe) GmbH
14 Chemin des Clos
38240 Meylan
www.accretech.eu
E-Mail info@accretech.eu
Phone +33 476 0440 80

United Kingdom

ACCRETECH SBS UK Ltd.
Unit 2, Leofric Court
Progress Way, Coventry CV3 2NT
www.accretech.eu
E-Mail info@accretech.eu
Phone +44 2476 651 774

Ireland

ACCRETECH SBS UK Ltd.
Unit 2, Leofric Court
Progress Way, Coventry CV3 2NT
www.accretech.eu
E-Mail info@accretech.eu
Phone +44 2476 651 774

Denmark

ACCRETECH SBS UK Ltd.
Unit 2, Leofric Court
Progress Way, Coventry CV3 2NT
www.accretech.eu
E-Mail info@accretech.eu
Phone +44 2476 651 774

Sweden

ACCRETECH SBS UK Ltd.
Unit 2, Leofric Court
Progress Way, Coventry CV3 2NT
www.accretech.eu
E-Mail info@accretech.eu
Phone +44 2476 651 774

Norway

ACCRETECH SBS UK Ltd.
Unit 2, Leofric Court
Progress Way, Coventry CV3 2NT
www.accretech.eu
E-Mail info@accretech.eu
Phone +44 2476 651 774

Finland

ACCRETECH SBS UK Ltd.
Unit 2, Leofric Court
Progress Way, Coventry CV3 2NT
www.accretech.eu
E-Mail info@accretech.eu
Phone +44 2476 651 774

Netherlands

ACCRETECH (Europe) GmbH
14 Chemin des Clos
38240 Meylan
www.accretech.eu
E-Mail info@accretech.eu
Phone +33 476 0440 80

Spain

Izasa Scientific S.L.U.
C/Jesus Serra Santamans, 5. Poligono
Industrial Can Sant Joan
08174 Sant Cugat del Vallés
Barcelona
www.izasascientific.com
E-Mail izasa@izasascientific.com
Phone +34 900 81 00 61

Portugal

Izasa Scientific, LDA
Avenida do Forte n° 6
Edificio Ramazzotti – 3° Piso 2.24
2790-072 Carnaxide, Lisboa
www.izasascientific.com
E-Mail izasapt@izasascientific.com
Phone +351 800 787 888

Poland

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Hungary

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Bulgaria

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Romania

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Slovakia

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Slovenia

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Czech Republic

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Turkey

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

Serbia

ACCRETECH -Tosei Hungary Kft.
Liget utca 1
2040 Budaörs
www.accretech.eu
E-Mail info@accretech.eu
Phone +36 23 232 224

We reserve the right to change the contents of this catalog, including product specifications, without notice when products are updated. Some of our products shall be controlled by the Foreign Exchange and Foreign Trade Act, and required an export license by the Japanese Government. Regarding exporting the products and/or providing a non-resident with technologies, please consult ACCRETECH (Tokyo Seimitsu).



EUROPE

ACCRETECH (Europe) GmbH
Landsberger Str. 396, 81241 Munich, Germany
Phone +49 89 2500 64-200, Fax +49 89 2500 64-210
info@accretech.eu
www.accretech.eu